




CASCADE  
LUXURY VINYL



[www.cascadeluxuryvinyl.com](http://www.cascadeluxuryvinyl.com)

Creative  
Options

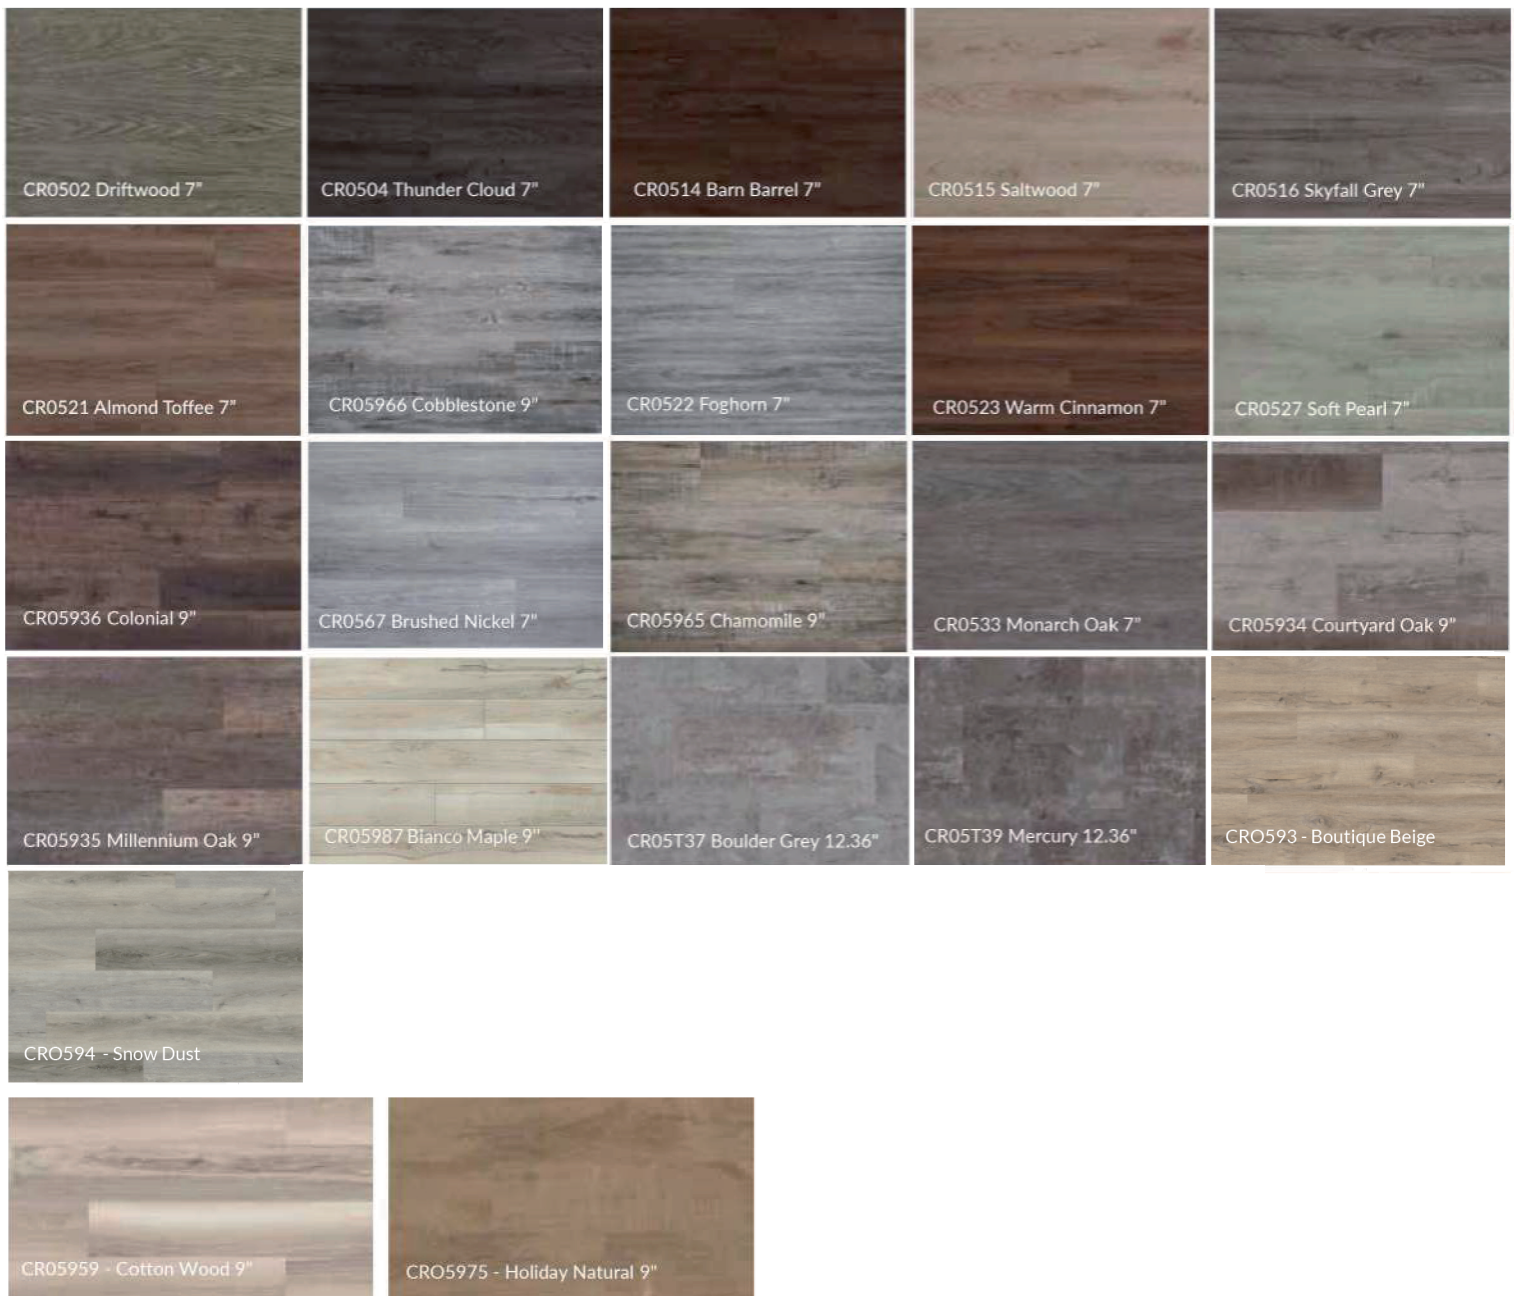



CASCADE  
LUXURY VINYL



[www.cascadeluxuryvinyl.com](http://www.cascadeluxuryvinyl.com)

## CREATIVE OPTIONS SPECIFICATIONS

|                      |                                                                        |
|----------------------|------------------------------------------------------------------------|
| Contructions         | PVC                                                                    |
| Thickness            | 5mm                                                                    |
| Wear Layer           | 0.5mm   20 mil                                                         |
| Size                 | 7" x 48", 9" x 48" & 12.36" x 24.6"                                    |
| Finish               | Polyurethane w/ anti bacterial nano silver, ultra matte                |
| Edge Detail          | Square edge                                                            |
| Sf Per Carton        | 7" 23.33, 9" 23.94, 12.36" 21.10                                       |
| Sf Per Pallet        | 7" x 48" = 1,166.50<br>9" x 48" = 1,244.88<br>12.36" x 24.6" = 1,181.6 |
| Installation         | Loose Lay (glue down optional)                                         |
| Classification       | Best                                                                   |
| Residential Warranty | Lifetime Limited Residential                                           |
| Commerical Warranty  | 12 Year Limited Heavy Commercial                                       |
| Recommended Adhesive | Cascade XT360                                                          |
| Approved Adhesives   | Wolf Grip Premium<br>Armstrong S - 995.                                |

## PERFORMANCE TESTING

|                              |                                               |
|------------------------------|-----------------------------------------------|
| Reaction To Fire             | EN ISO 11925-2   Pass<br>EN ISO 9239-1   Pass |
| Chemical Resistance          | ASTM F925   Pass                              |
| Light Resistance             | ASTM F1515   < 8                              |
| Wear Resistance              | ASTM F510   Wear group P<br>EN 434   ≤ 0.25%  |
| Static Electrical Propensity | 0.5kV                                         |
| Residual Indentation         | EN ISO 24343-1   Avg 0.02mm                   |
| Anti-Slip Property           | DIN 51130   R10                               |
| Voc Emission                 | ISO 16000   A+                                |
| Phalates                     | EN 14372   N.D.<br>CPSC-CH-C 1101   Pass      |
| Castor Chair                 | ISO 4918   Pass                               |

Creative  
Options

